


BTS3BE0600 BTS4BE0600  
 BTS3BE0800 BTS4BE0800  
**MCCB Type Transfer Switch**  
 Rated Current 500~800A Voltage 100~600VAC

**Features**

- High Short Circuit Breaking Capacity
- Incorporate OCPD\* Design
- Complies with IEC60947-6 requirements\*\*
- MCCB Has Auxiliary Limit Switch Inside
- Reliable Motor-Operated Transfer Mechanism
- Molded Insulating Manual Handle
- PVC-Coated Bus Bar > 3KV Insulation
- With Mechanical Interlock
- Includes Plug-in Connector, For Simple Hook-up to Controller

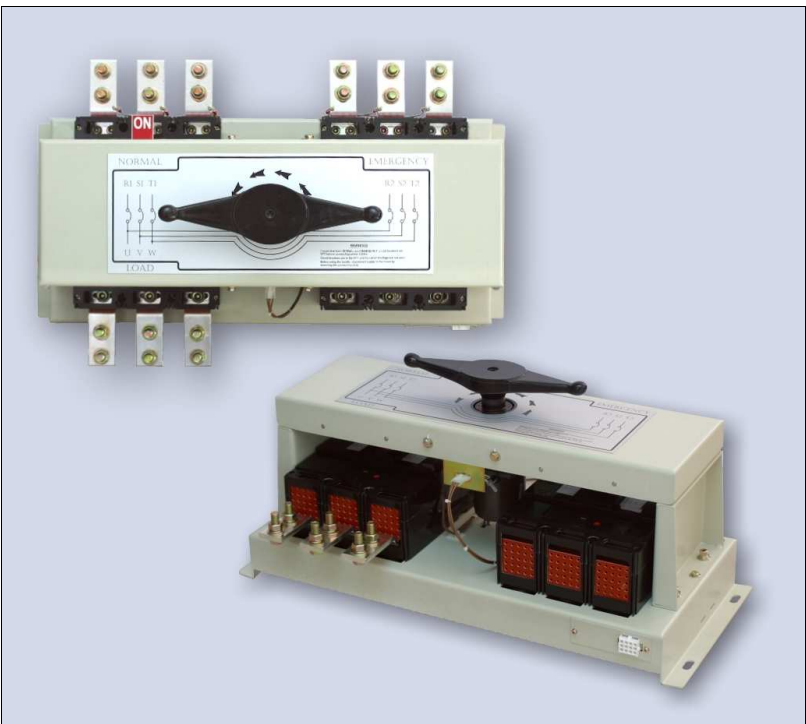


**BTS Rated Operating Current & AC Rated Breaking Capacity**

BTS Type	Pole	Rated Current(A) Ambient Temperature 40°C		AC Rated Breaking Capacity					
				Sym r.m.s.(KA) IEC 60947-2 Icu/Ics					
				240V	380V	415V	440V	500V	690V
BTS3BE600	3P	500	600	35	25	25	20	18	-
BTS4BE600	4P	500	600	50	45	35	30	25	16
BTS3BE800	3P	700	800	50	45	35	30	25	16
BTS4BE800	4P	700	800	85	65	50	50	35	20

\*For special high breaking capacity requirements, please contact us.

**Mechanical Specifications**

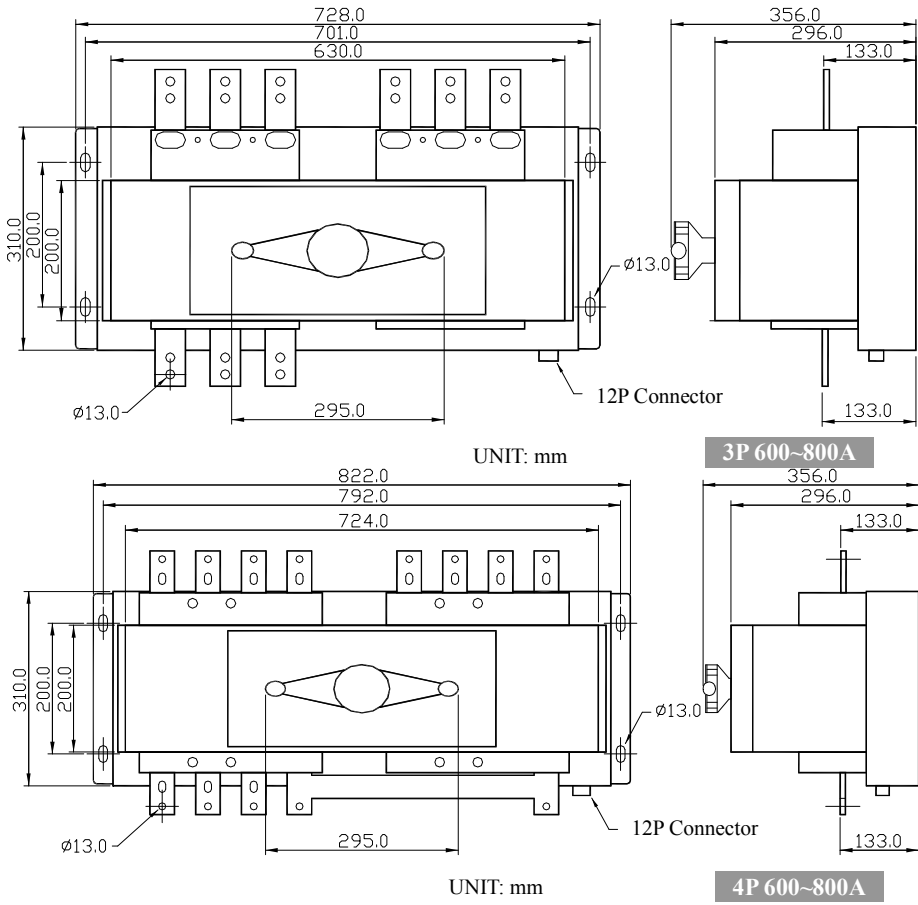

**\*OCPD :**  
 Over Current Protection Device

**\*\*IEC60947-6 Class CB :**  
 ATS provided with over current trip and the main contacts of which are capable of making and are intended for breaking short circuit currents.

**\*\*IEC60947-6 Utilization Category AC-33A :**

1. Frequent operations.
2. Motor loads or mixed loads including motors, resistive loads and up to 30% incandescent lamp.

**\*Customized BTS Available :**  
 Please provide the required specification and specified MCCB type (if there is any), we will evaluate the mechanical capability for customers.