

DSP-10

Genset Multi-Function Display Module

Features

First and only Multi-function Display Module specially designed for generator set.

Three sets four Digits High illumination LED Suitable for Outdoor use

Microprocessor Based Design

Full Phase AC Voltage RMS value Display

Full Phase with Load RMS value Display

AC Input Frequency Display

DC Supply Voltage Display

Engine Operating Time Display

All values can be programmed according to user's actual demand to be cyclic displayed

Compact, Anti-shock, Easy installation

DIN rail terminal for easy connection

Four adjustable Voltage and Current Push Buttons


Five Dip Switches For Specification Setting



Specifications

| | |
|------------------------|----------------------------------|
| DC Supply | DC Voltage 9 ~ 36 VDC (12V, 24V) |
| Alternator Input Range | AC Voltage 10 ~ 500 VAC |
| | Current 0 ~ 3000 Amp |
| | Frequency 50 / 60 Hz |
| Rated CT Capacity | Above 2.5VA |
| CT Secondary Ratio | 5A |
| Power Consumption | Under 5VA |
| Operating Temperature | -20 ~ 70 ° |
| Relative Humidity | Under 90% |
| Dimension | H * W * D = 72 * 72 * 50 mm |
| Weight | 100 gram |

Mechanical Specifications (mm)

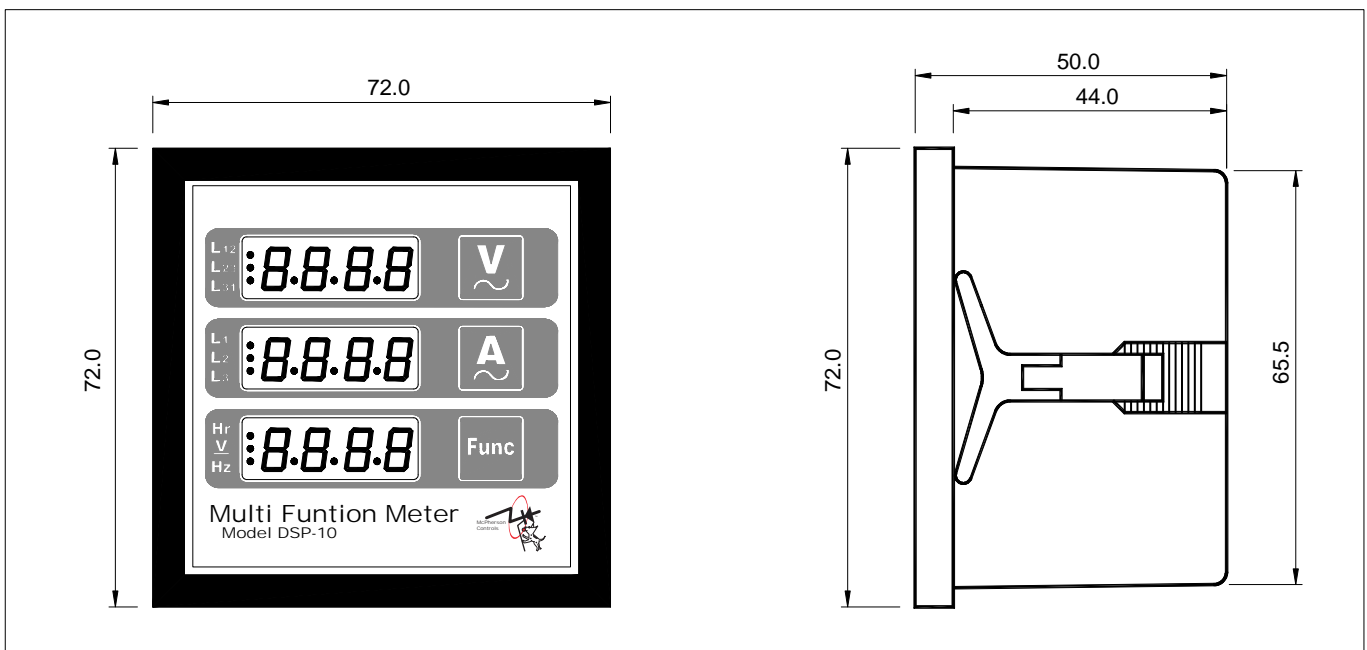

Cut-Out: 66.0±0.5 mm × 66.0±0.5 mm