

40 kw

NEWAGE/LDO

MTS 40J1



4501 NW 27th Ave Miami, Fl
Ph. 305 634 1511 Fax. 305 633 1461

General Specifications

65db @ 7 Meters

00POBM54

- **John Deere** Powered Generator Set with **NEWAGE** Alternators
- Rugged enough for continuous applications
- Standard 00 Gallon Double Walled Tank UL-142
- Standard Auto/Remote Start Module,
- Full engine protection control panel
- Muffler, Vibration Isolators Installed
- Battery, Battery Rack & Cables
- 120VAC Battery Charger
- Full set of manuals (Engine & Generator)
- Heavy Duty Aluminum Enclosure

Generator Specs

Generator: **NEWAGE**


- UL 1446
- Flexible disc coupling
- Self-exciting & self regulating
- Drip proof alternator
- Class 'H' Insulation
- Voltage regulation 1.5 %
- 150Amp Main Breaker On Unit

Engine Specs

- Engine **John Deere** EP3029HFU89
- EPA Certified I-4 (Stationary)
- Type: 4 Cycle water cooled
- Turbo Charged—1800 RPM
- Displacement: 2.9 liters
- Compression Ratio: 17.5 to 1
- Fuel Consumption: < > 9.3 liter / hr
- Governor: Electronic
- Cooling: Blower type steel blades
- Charging Alternator: 12v

ATS Specs

- Model: ATS21//2N3 237,21\$
- UL 1008
- Amp / 240olt / 1Phase / 60 Hz.
- ATS-22 Digital Programmable PLC
- Manual Override
- Water Tight Enclosure
- Weekly Exerciser Timer Digital
- Adj. Over/Under Voltage Protection
- Standard Adjustable Timers and Delays

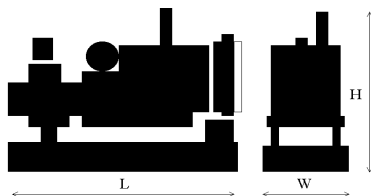

Length: 1 in; Width: 50 in;
Height: 60 in; Weight: 3500 lbs.