23 kw Industrial

MTS 23K1

4501 NW 27th Ave Miami, Fl
Ph. 305 634 1511 Fax. 305 633 1461

OPTIONAL ATS

65db @ 7 Meters

General Specifications

- **Kohler** Powered Generator Set with **Marelli** Alternators
- Rugged enough for continuous applications
- Standard 100 Gallon Aluminum Tank
- Standard Auto/Remote Start Module,
- Full engine protection control panel
- Muffler, Vibration Isolators Installed
- Battery, Battery Rack & Cables
- 120VAC Battery Charger
- Full set of manuals (Engine & Generator)
- Heavy Duty Aluminum Enclosure

Engine Specs

- Engine **Kohler** EP4025DK9004
- EPA Certified IT-4 (Stationary)
- Type: 4 Cycle water cooled
- Turbo Charged—1800 RPM
- Displacement: 2.4 liters
- Compression Ratio: 17.5 to 1
- Fuel Consumption: <> 9.3 liter / hr
- Governor: Electronic
- Cooling: Blower type steel blades
- Charging Alternator: 12v

Generator Specs

Generator: **Marelli**

- UL 1446
- Flexible disc coupling
- Self-exciting & self regulating
- Drip proof alternator
- Class 'H' Insulation
- Voltage regulation 1.5 %
- 100Amp Main Breaker On Unit

ATS Specs

- Model: BTB2P2UD200N4 **(OPTIONAL)**
- UL 1008
- 200Amp / 240 Volt / 1Phase / 60 Hz.
- Digital Programmable PLC
- Manual Override
- Water Tight Enclosure
- Weekly Exerciser Timer Digital
- Adj. Over/Under Voltage Protection
- Standard Adjustable Timers and Delays

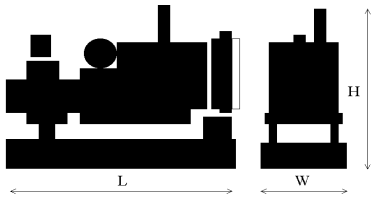

Length: 92 in; Width: 36 in;
Height: 50 in; Weight: 1800 lbs.