

50 kw DIESEL POWER MTS 50J



4501 NW 27th Ave Miami, FL
Ph. 305 634 1511 Fax. 305 633 1461



65db @ 7 Meters



General Specifications

- **John Deere** Powered Generator Set with **STAMFORD** Alternators
- Rugged enough for continuous applications
- Standard Heavy Duty Skid
- Standard auto/remote start module,
- Full engine protection control panel
- Muffler, Vibration Isolators Installed
- Battery, battery rack & cables
- 120VAC Battery Charger
- Full set of manuals (Engine & Generator)

Engine Specs


- Engine **John Deere** EP5030TF270
- EPA Certified EXPORT
- Type: 4 Cycle water cooled
- Turbo Charged
- 1800 RPM
- Displacement: 3.0 liters
- Compression Ratio: 17.5 to 1
- Fuel Consumption: <> 9.3 liter / hr
- Governor: Electronic
- Cooling: Blower type steel blades

Generator Specs

- Generator: **STAMFORD**
- UL 1446
- UCI224D1L for 3 Phase Application
- UCI224D1J for 1 Phase Application
- Flexible disc coupling
- Self-exciting & self regulating
- Drip proof alternator
- Class 'H' Insulation
- Voltage regulation 1.5 %
- Main Breaker Mounted on Unit

Available Options

- Single or UL Listed Double Walled Fuel Tank
- Aluminum Insulated Sound Enclosure
- Automatic Transfer Switch
- Trailer Mounted
- Multivoltage Selectors
- 12Vac Water Jacket Heater

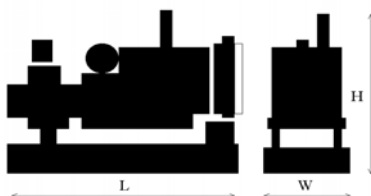

Length: 72 in; Width: 27 in;
Height: 48 in; Weight: 1400 lbs.



JOHN DEERE